

Printed November 1985

A FIRST ORDER ANALYSIS OF THE EFFECT OF PITCHING ON THE DRAG COEFFICIENT

Robert E. Wilson
James A. Neff

Oregon State University
Corvallis, OR 97331

Prepared by
Sandia National Laboratories
Albuquerque, New Mexico 87185 and Livermore, California 94550
for the United States Department of Energy
under Contract DE-AC04-76DP00789

Issued by Sandia National Laboratories, operated for the United States Department of Energy by Sandia Corporation.

NOTICE: This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, nor any of their contractors, subcontractors, or their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government, any agency thereof or any of their contractors or subcontractors. The views and opinions expressed herein do not necessarily state or reflect those of the United States Government, any agency thereof or any of their contractors or subcontractors.

A First Order Analysis of the Effect
of Pitching on the Drag Coefficient

by

Robert E. Wilson

James A. Neff

Oregon State University

Mechanical Engineering Department

October, 1984

SUMMARY

A first order analysis was made for the drag coefficient of a pitching NACA 0015 airfoil below stall. The inviscid velocity distribution for a translating NACA 0015 airfoil was superimposed with the additional circulation velocity for a pitching ellipse. The resulting velocity distribution was used to numerically integrate a momentum/boundary layer formulation to obtain the drag coefficient.

For both laminar and turbulent boundary layers it was found that the effect of pitching on the drag coefficient can be approximated by a shift in angle of attack. The shift angle was found to be a linear function of the pitching velocity and to be less than the induced angle of attack caused by the pitching.

INTRODUCTION

The blade of a Darrieus wind turbine experiences a wide variety of angles of attack and unsteady flow conditions during each revolution of the rotor. Despite the complex flow field created by the Darrieus turbine, a quasi-steady inviscid analysis has been shown to do an adequate job of predicting loads below stall [1]. The inviscid quasi-steady analysis [1] has contributions from three sources; first, a Kutta-Joukowski force which includes the circulation due to the pitching motion; second, a chordwise harmonic force due to pitching; and third, a normal harmonic force due to the normal acceleration. The Kutta-Joukowski force is dominant for the current designs of Darrieus Rotors. State-of-the-art methods used for performance analysis of the Darrieus Rotor employ a quasi-steady approach for performance analysis below stall [2,3,4,5] using only the Kutta-Joukowski term for lift. Drag is also used.

In these quasi-steady analyses, the lift and drag coefficients are obtained by entering tables of static airfoil data with an equivalent angle of attack adjusted for the pitching circulation. This approach is certainly reasonable for evaluating the lift coefficient, however this approach is questioned for prediction of drag coefficient. The reason for questioning this approach for determination of the drag coefficient lies in the alteration of the airfoil pressure distribution caused by the pitching motion. The present study investigated the effect of steady pitching motion on the drag coefficient of an unstalled NACA 0015 airfoil by a numerical momentum/boundary layer analysis.

Below is a summary of the features of the model:

- 1) The velocity distribution was a superposition of two flows,
 - a) the streaming motion past a NACA 0015 airfoil as a function of geometric angle of attack, and
 - b) the relative velocity on the surface of an ellipse pitching at a constant rate in still fluid. Ghodoosian [6] has shown that the pressure distribution about a pitching NACA 0015 airfoil is adequately predicted by the superposition of the potentials for the streaming motion of an NACA 0015 airfoil and for an ellipse with the same leading edge shape as the NACA 0015 airfoil.
- 2) The drag coefficient was calculated by a boundary layer quadrature of the combined velocity distribution to obtain the momentum thickness at the trailing edge.
- 3) A lift calculation was performed by integration of pressure coefficient around the airfoil in order to check the accuracy of the method.

The velocity and the pressure distribution were not corrected for boundary layer displacement thickness. The method is therefore a first order approximation for drag.

Both laminar and turbulent boundary layer cases were run. Two methods were tried for predicting the point of transition to turbulence, the first due to Michel [7] and the second used by Eppler [8]. The test cases were selected to approximate the range of operating Reynolds numbers and pitch rates encountered in normal operation of Sandia National Laboratories' 17m research vertical axis wind turbine.

The following paragraphs describe the development of the model along with the results of the investigation.

VELOCITY DISTRIBUTION - NACA 0015 AIRFOIL

The data of Abbott and von Doenhoff [9] were used for the potential flow velocity distribution on the airfoil. For symmetric airfoils the velocity consists of two components, a basic thickness velocity plus an additional velocity due to the circulation. That is

$$\left. \frac{u}{V} \right|_{\text{Translation}} = \left. \frac{u}{V} \right|_{\text{Thickness}} \pm \frac{\Delta u}{V} C_L(\alpha)$$

The values for the velocity were available at 19 points along the chord. The spacing of these points gave a fairly smooth distribution except near the leading edge. At the leading edge, the velocity gradient is the largest and the need for accuracy the greatest. For the present study the data was smoothed for $0.0 < x/c < 0.005$. The basic thickness velocity was modeled by the distribution on the leading edge of an ellipse, following the form of the analytical solution. The circulation velocity data was smoothed by three-point Lagrangian interpolation. Together these effects produced a model for total velocity that was similar to the flow near the leading edge of an ellipse. Linear interpolation was used between total velocity values on the remainder of the airfoil. Next an expression for the pitching component of the velocity was needed.

PITCHING ELLIPSE

The additional bound circulation created by the pitching motion of the Darrieus blade affects the pressure distribution on the blade and therefore

the growth of the boundary layer. Within the accuracy of the present analysis the pitching airfoil can be modeled by a pitching ellipse, for which a closed form solution exists. A 20% thick ellipse was found to be a good approximation to the basic thickness velocity of a NACA 0015 airfoil near the leading edge [6]. The analysis for the inviscid flow relative to a pitching ellipse in a static fluid was carried out following the general method given by Milne-Thomson [10].

This method involves the mapping of a translating and rotating ellipse with chord c and thickness t , as shown in Figure 1, into a circle of radius R by the Joukowski transformation

$$z = \zeta + \frac{r^2}{\zeta}$$

where: $r^2 = (c^2 + t^2)/16$

$$R = (c + t)/4$$

The complex potential is obtained from the boundary function, a vortex is added to the center of the circle and the Kutta condition is applied at the trailing edge to obtain the strength of the pitching circulation, Γ_p . With the complex potential established, the velocity relative to the ellipse, q' , can be found from

$$q' = \frac{dW}{dz} - (U_x - iU_y) + i\Omega\tilde{z}$$

where: W = complex potential in ellipse plane

Ω = angular velocity of ellipse

$U_x - iU_y$ = complex velocity of the origin

For the present model the translational velocity terms were removed from the complex velocity of the ellipse leaving only the effects due to pitching

$$U_x = -V \cos \alpha$$

$$iU_y = V \sin \alpha + \Omega c \left(\frac{1}{2} - \frac{x_0}{c} \right)$$

Non-dimensionalizing the local relative complex velocity due to pitching yields

$$\frac{q'}{V} = \frac{1}{V} \frac{dW}{d\zeta} \frac{1}{dz/d\zeta} + i \varepsilon \frac{\tilde{z}}{c} + i \varepsilon \left(\frac{1}{2} - \frac{x_0}{c} \right)$$

where $\varepsilon = \frac{\Omega c}{V}$ and V is a reference velocity. The reference velocity used in this study is the free stream velocity relative to the airfoil.

The local relative velocity from this analysis was combined with the velocity for a translating NACA 0015 airfoil to obtain the total velocity distribution. With the total velocity distribution established as a function of angle of attack and pitching velocity, calculation of the drag and the lift coefficients followed.

CALCULATION OF DRAG COEFFICIENT

In a steady uniform flow, the drag on an object can be determined by calculating the momentum deficit in the wake far downstream of the object [12]. In terms of the momentum thickness far downstream, θ_∞ ,

$$C_D = \frac{2\theta_\infty}{c}$$

To obtain an expression in terms of the velocity on the airfoil, a form of the momentum-integral equation,

$$\frac{d \ln \theta}{dx} + (H+2) \frac{d \ln u}{dx} = 0$$

can be integrated downstream from the trailing edge to infinity. With the approximation for the average shape factor, $H \doteq 1/2 (H_{te} + H_{\infty})$ the integral yields,

$$\theta_{\infty} = \theta_{te} \left(\frac{u_{te}}{V} \right)^{1/2(H_{te} + H_{\infty} + 4)}$$

Further assuming that $H_{\infty} \doteq 1$ and $H_{te} \doteq 2$, the expression for drag coefficient becomes,

$$C_D = 2 \frac{\theta_{te}}{c} \left(\frac{u_{te}}{V} \right)^{7/2}$$

Here u_{te} is the trailing edge velocity.

Substituting the expression for momentum thickness due to Thwaites [7],

$$\theta^2 = \frac{0.45}{(u/V)^6} \frac{vc}{V} \int_0^{s/c} \left(\frac{u}{V} \right)^5 d\left(\frac{s}{c}\right),$$

the equation for the drag coefficient with a laminar boundary layer becomes

$$C_D = \sum_{\substack{\text{Upper} \\ \& \text{ lower} \\ \text{surfaces}}} \left[\frac{1.422}{Re_c^{3/5}} \left\{ \frac{u_t}{V} \int_0^{s_t/c} \left(\frac{u}{V} \right)^5 d\left(\frac{s}{c}\right) \right\}^{3/5} + \frac{0.02429}{Re_c^{1/5}} \int_{s_t/c}^1 \left(\frac{u}{V} \right)^4 d\left(\frac{s}{c}\right) \right]^{5/6}$$

The subscript 't' denotes the point of transition to turbulent boundary layer and the s-coordinate follows the surface of the airfoil.

The numerical integration was carried out using the trapezoidal rule with approximately 400 integration points on the airfoil. A varying step size gave good refinement near the leading edge.

LIFT COEFFICIENT

The pressure coefficient was calculated from the total velocity by the steady Bernoulli equation. Force coefficients in the x- and y-coordinate directions were calculated by integrating the pressure coefficient around the airfoil

$$F_x = \int_{\text{airfoil}} C_p d\left(\frac{y}{c}\right)$$

$$F_y = \int_{\text{airfoil}} C_p d\left(\frac{x}{c}\right)$$

The lift coefficient was resolved from F_x and F_y as a function of angle of attack by

$$C_L = (F_y \cos \alpha - F_x \sin \alpha)$$

The final question to resolve was how to determine the point of transition to turbulent boundary layer.

TRANSITION TESTS

Two methods of calculating transition points were investigated.

The first method, given by Michel [7], predicts transition based on local momentum thickness. Transition is said to occur when

$$Re_\theta \geq 2.9 Re_s^{0.4}$$

where the s-coordinate follows the surface. This method was convenient since the momentum thickness was already calculated.

The second method, used by Eppler [8], required the calculation of the energy thickness, $H_{32} = \delta_3/\theta$.

The criterion for transition was

$$\ln Re_\theta \geq 18.4 H_{32} - 21.74$$

The calculation of H_{32} by Pohlhausen momentum integral methods outlined in Schlichting [12] involved an expression for the second shape factor, $K = \frac{\theta^2}{\nu} \left(\frac{du}{ds} \right)$, which contains the surface velocity derivative. In comparing results of the two methods it was found that Michel's test, which involves integration of the velocity, was more stable and consistent than the velocity derivative dependent test used by Eppler for the numerical calculations of the present model. All of the following results involving turbulent boundary layer calculations were obtained using Michel's transition test.

RESULTS

The accuracy of the code was checked by comparing static airfoil drag coefficient results with Eppler predictions for the NACA 0015 airfoil [13]. Figure 2 shows drag coefficient vs. angle of attack for $Re = 2 \cdot 10^6$. The agreement is good at low and moderate angles of attack.

The primary purpose of the investigation was comparison of pitching with non-pitching results. For the pitching cases the parameters were chosen to approximate the geometry and operating conditions of the Sandia 17m vertical axis wind turbine. The airfoil was NACA 0015 and the center of rotation of the airfoil was $x_o/c = 0.38$. Two Reynolds numbers were run with five values of angular velocity parameter as outlined in Table 1.

TABLE 1

Case	Reynolds Number	Angular Velocity Parameter $\epsilon = \frac{c\Omega}{V}$
Laminar	10^6	$0., \pm 0.07, \pm 0.105$
Turbulent	$1.5 \cdot 10^6$	$0., \pm 0.07, \pm 0.105$

For the first case the boundary layer was assumed to be fully laminar. For the second case transition was allowed to occur.

Note that for a symmetrical airfoil the $\pm\epsilon$ runs for positive angle of attack cover all conditions of pitching encountered by a Darrieus rotor. That is:

$(+\alpha, +\epsilon)$ is equivalent to $(-\alpha, -\epsilon)$

$(+\alpha, -\epsilon)$ is equivalent to $(-\alpha, +\epsilon)$

The majority of the results hereafter are presented only for the turbulent case with $\epsilon = \pm 0.105$ for clarity of presentation.

Figure 3 illustrates the effect of positive pitching on the drag coefficient. There is a drag reduction at negative angles of attack, corresponding to the downwind half of a Darrieus rotor, and a drag rise at positive angles of attack on the upwind portion of the rotor. The change in drag coefficient with pitching can be approximated by a shift in angle of attack such that

$$C_D(\alpha) \Big|_{\text{pitching}} = C_D(\alpha + \alpha_{ds}) \Big|_{\text{static}}$$

where: α = geometric angle of attack

α_{ds} = drag shift angle

The drag shift angle was found to be a linear function of the pitching velocity parameter, ϵ . For the laminar case the drag shift angle was

$$\alpha_{ds} = 0.18 \epsilon$$

For the turbulent case the drag shift angle was

$$\alpha_{ds} = 0.23 \epsilon$$

An insignificant reduction in the calculated value of C_{D_0} occurred, from 0.00724 to 0.00718.

The lift coefficient is dependent only upon the angle of attack and pitching circulation and was therefore the same for laminar and turbulent cases. Figure 4 shows the calculated lift coefficient versus angle of attack for the various pitching rates.

The change in lift coefficient due to pitching circulation is well approximated by a pitching angle of attack, α_p , such that

$$C_L(\alpha) \Big|_{\text{pitching}} = C_L(\alpha + \alpha_p) \Big|_{\text{static}}$$

The pitching angle is a linear function of the pitch velocity. For the present model of a NACA 0015 airfoil, the induced pitching angle was

$$\alpha_p = 0.39 \epsilon$$

This value compares favorably with theoretical values of the induced pitching angle. With the same center of rotation as the airfoil, the theoretical values of α_p for a pitching flat plate and a pitching 15% thick ellipse are $\alpha_p = 0.37 \epsilon$ and $\alpha_p = 0.42 \epsilon$, respectively. Ghodoosian [6] obtained $\alpha_p = 0.385 \epsilon$ for the NACA 0015 airfoil.

In previous quasi-steady analyses the pitching angle α_p has been used as a best estimate for the drag shift angle α_{ds} . The error in this approach can be seen by expressing calculated α_{ds} as a fraction of α_p :

$$\text{Laminar Case} \quad \alpha_{ds} = 0.46 \alpha_p$$

$$\text{Turbulent Case} \quad \alpha_{ds} = 0.59 \alpha_p$$

The addition of pitching circulation is seen to affect drag coefficient less than lift coefficient.

The investigation was next refined to analyze separately the effects of pitching on the suction and pressure surfaces of the airfoil.

Figure 5 shows the transition points on suction and pressure surfaces as a function of angle of attack. For this Reynolds number and pitch velocity, transition was affected much more on the pressure side than on the suction side.

A major portion of the drag on an airfoil at moderate angle of attack comes from the suction surface where adverse pressure gradients cause rapid boundary layer growth. Figure 6 illustrates this behavior for a static airfoil and demonstrates the effect of pitching on the relative contributions from each surface, i.e. $C_D = C_{D_s} + C_{D_p}$. Pitching is seen to increase the drag on the suction surface and decrease the drag on the pressure surface for positive pitching.

Figure 7 is a plot of the contribution from each surface to the increment in C_D due to pitching, ΔC_{D_i} . That is,

$$\Delta C_{D_i} = C_{D_i}(\text{pitching}) - C_{D_i}(\text{static})$$

where: $i = s$, suction surface

$i = p$, pitching surface

It is seen that ΔC_{D_i} is a non-linear function of angle of attack, with the increment in C_D due to pitching increase due to effects on the suction surface of the airfoil.

CONCLUSIONS

The present first order analysis has shown that for the range of Reynolds number and pitch velocity investigated:

- 1) The effect of pitching on drag coefficient can be approximated by a linear shift in the angle of attack, allowing the use of static airfoil data in quasi-steady aerodynamic analyses.
- 2) The effect of pitching on the drag coefficient is due to a change in boundary layer development, since:
 - a. a larger portion of the change in drag due to pitching occurs on the suction surface of the airfoil, and,
 - b. the change in drag is not due to a shift in transition point on the suction surface.

REFERENCES

1. Wilson, Robert E., P.B.S. Lissaman, M. James and W.R. McKie, "Aerodynamic Loads on a Darrieus Rotor Blade," Journal of Fluids Engineering, Vol. 105, March, 1983, pp. 53-58.
2. Strickland, J.H., "The Darrieus Turbine: A Performance Prediction Model Using Multiple Streamtubes," Advanced Energy Projects Department, Sandia Laboratory, SAND 75-0431, Oct., 1975.
3. Strickland, J.H., Webster, B.T., Nguyen, T., "A Vortex Model of the Darrieus Turbine: An Analytical and Experimental Study," Sandia Laboratories, Albuquerque, N.M., SAND 75-7058, Feb., 1980.
4. Paraschivoiu, I., "Double-Multiple Streamtube Model for Darrieus Wind Turbines," 2nd DOE/NASA Wind Turbine Dynamics Workshop, Cleveland, Ohio, Feb., 1981.
5. Wilson, R.E., and Walker, S.N., "Fixed Wake Analysis of the Darrieus Rotor," Journal of Fluids Engineering, Dec., 1983, pp. 389-393.
6. Ghodoosian, Nader, "Calculation of the Pressure Distribution on a Pitching Airfoil with Application to the Darrieus Rotor" Sandia National Laboratories Contractor Report SAND84-700, Albuquerque, NM, 87185, May, 1984.
7. Michel, R. ONERA Rep.1/1578-A, 1952.
8. Eppler, R., "Turbulent Airfoils for General Aviation," Journal of Aircraft, 15(2):93-99, February, 1978.
9. Abbott, I.H., von Doenhoff, A.E., and Stivers, L.S., Jr., "Summary of Airfoil Data," NACA Rept. 824, 1945.
10. Milne-Thomson, L.M., "Theoretical Hydrodynamics," Fifth Edition, The MacMillan Press, Ltd., London, 1968.

11. Thwaites, Bryan, "Incompressible Aerodynamics," Oxford University Press, 1960, pp. 179-182.
12. Schlichting, Hermann, "Boundary Layer Theory," Fourth English Edition, McGraw-Hill Book Co., 1979, pp. 206-210.
13. Sheldahl, Robert E. and Klimas, Paul C., "Aerodynamic Characteristics of Seven Symmetric Airfoil Sections Through 180-Degree Angle of Attack for Use in Aerodynamic Analysis of Vertical Axis Wind Turbines," SAND80-2114, Sandia National Laboratories, Albuquerque, NM, March, 1981.

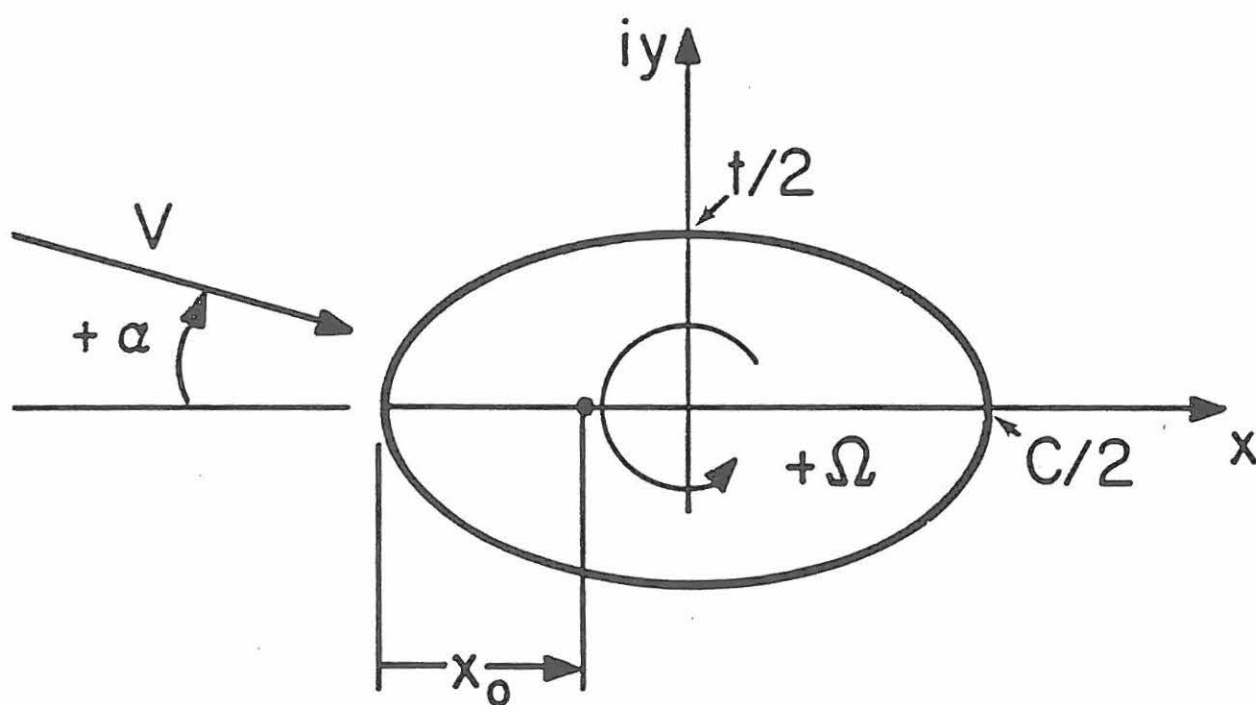


FIGURE 1. Ellipse in z -plane. Sign conventions on α and Ω .

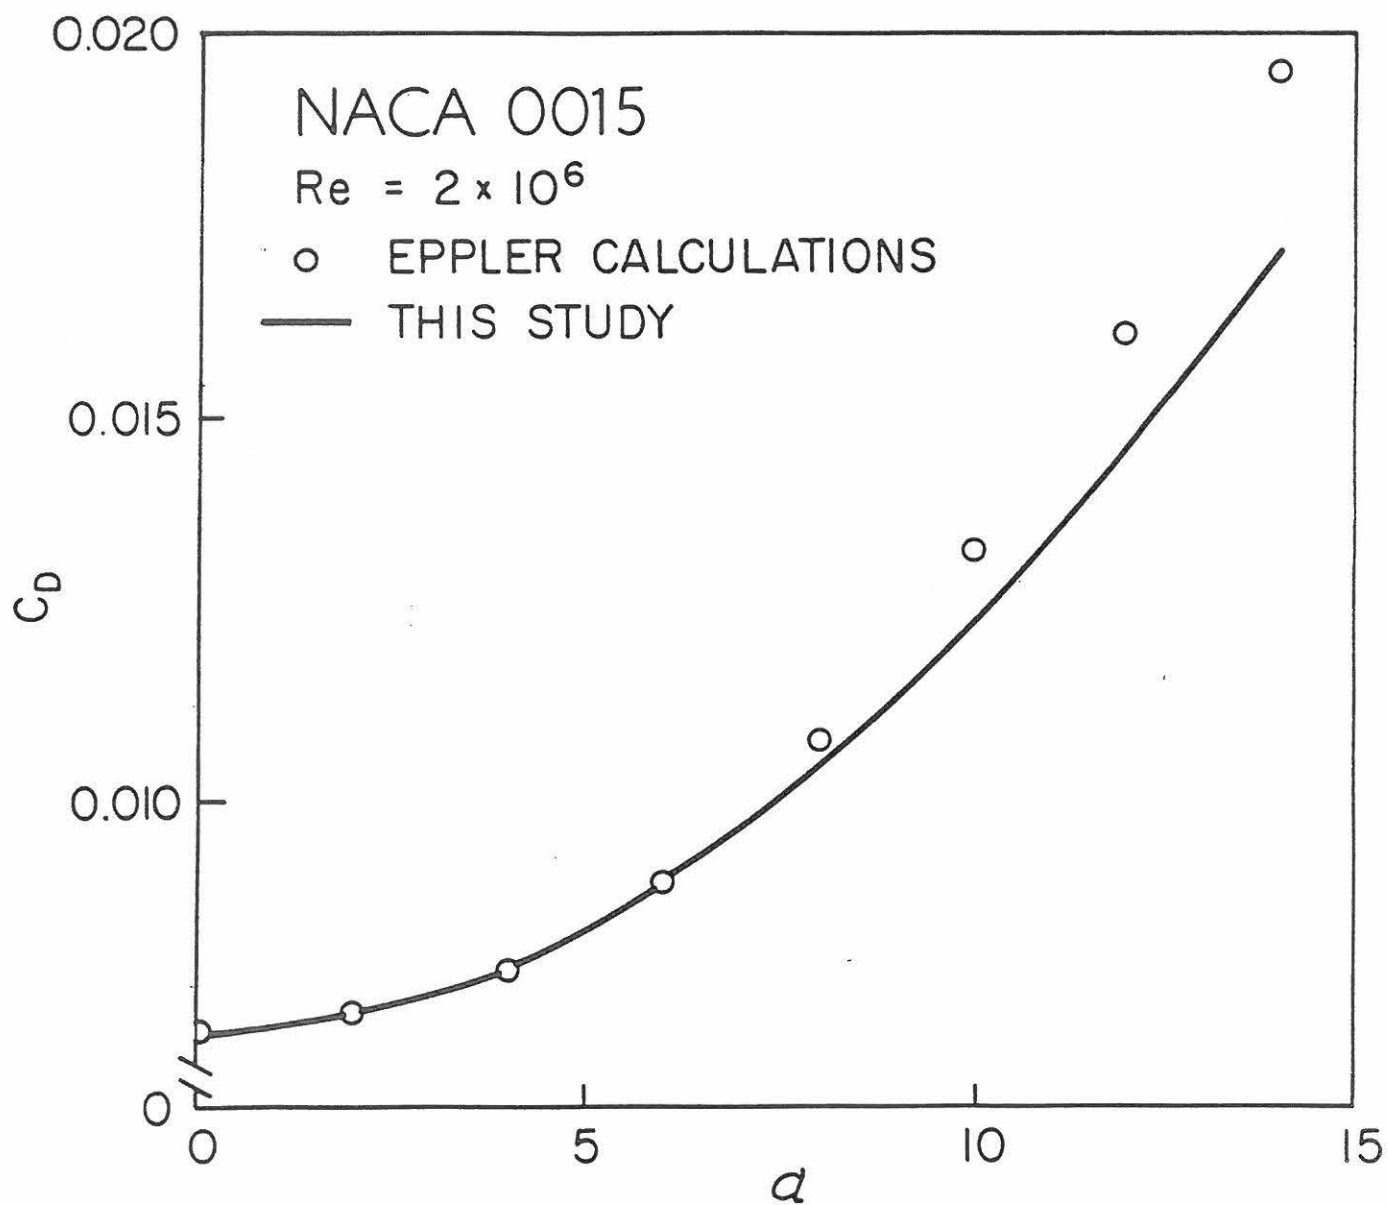


FIGURE 2. Drag coefficient as a function of angle of attack
for static airfoil

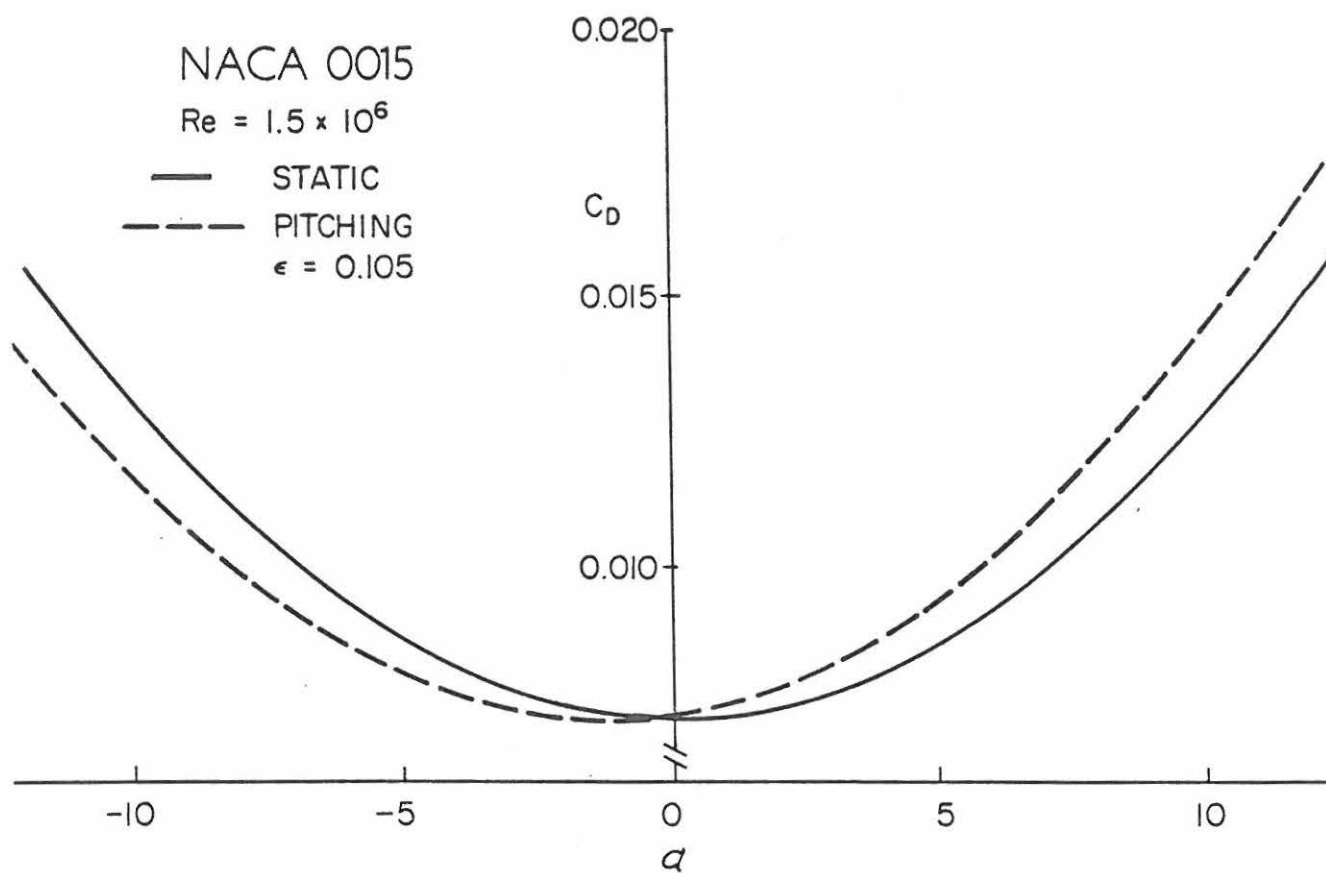


FIGURE 3. Effect of positive pitching on drag coefficient.

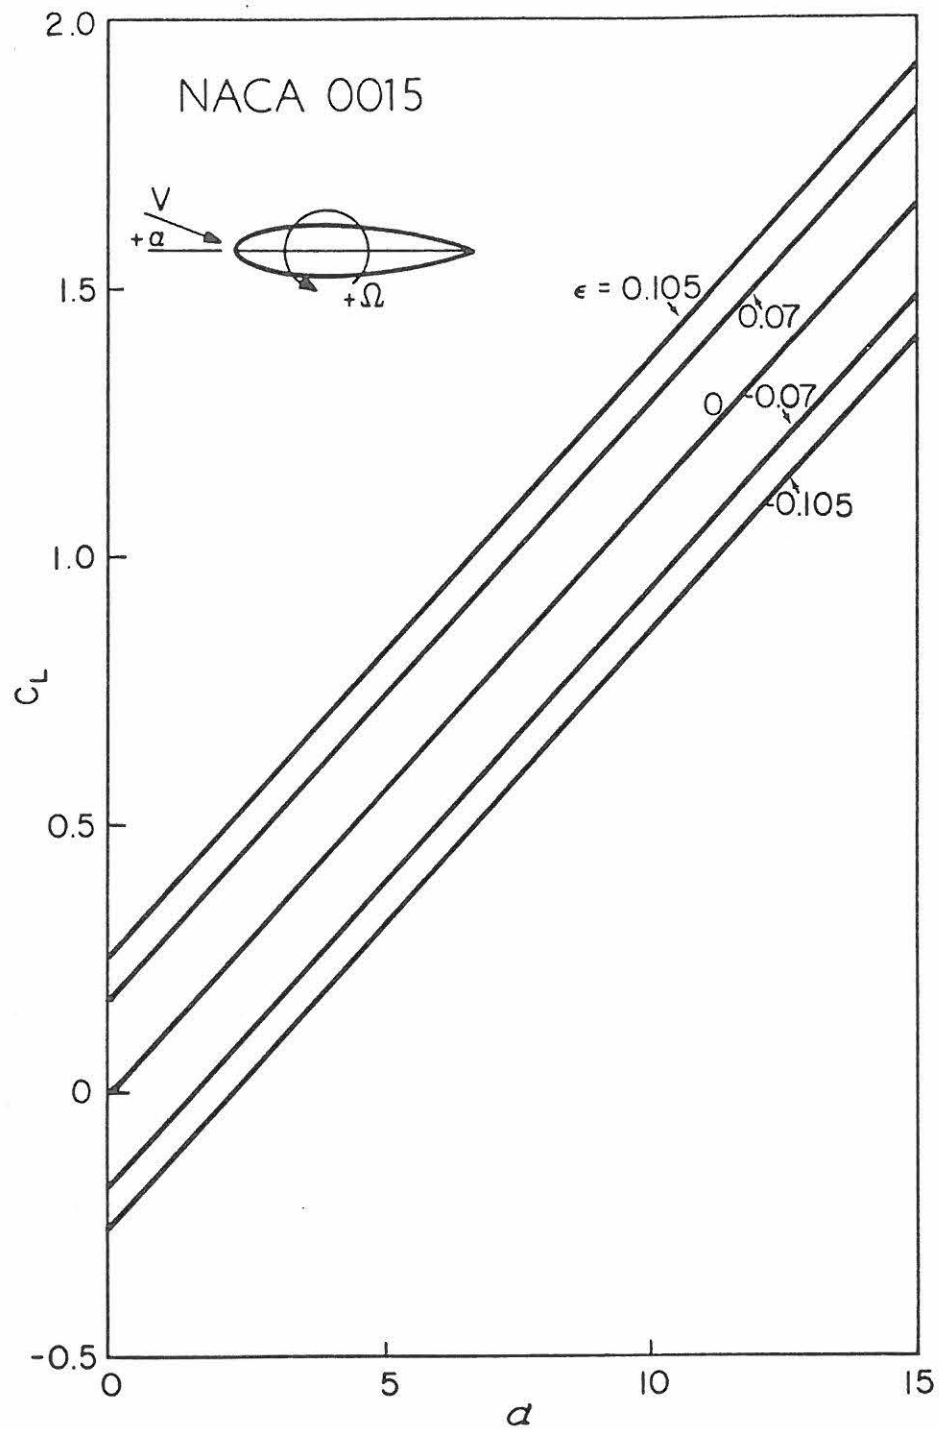


FIGURE 4. Lift coefficient as a function of local aerodynamic angle of attack.

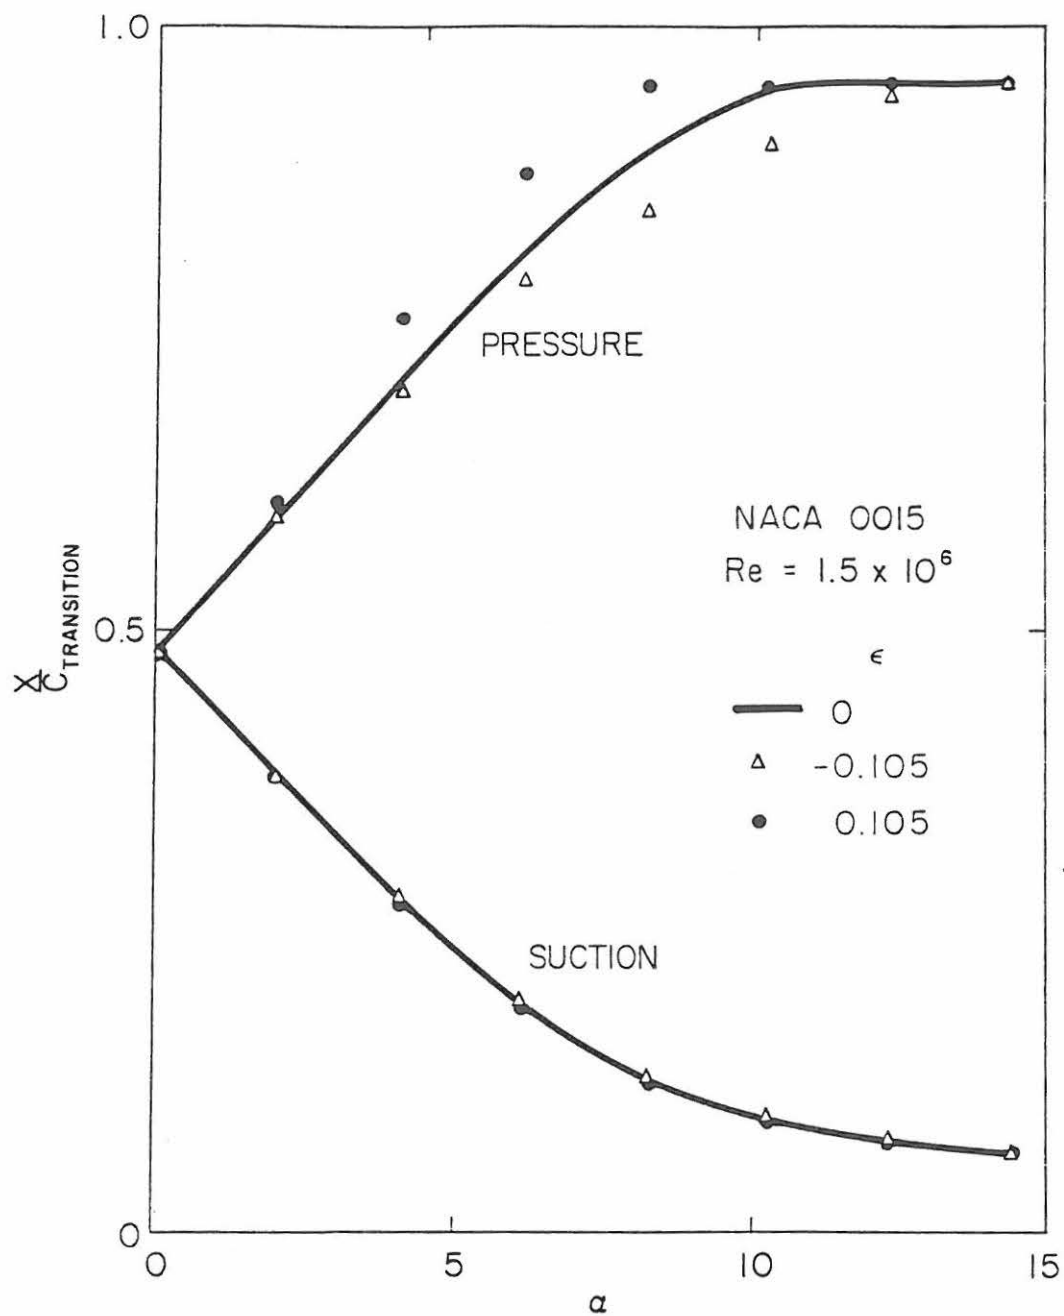


FIGURE 5. Effect of pitching on transition to turbulent boundary layer.

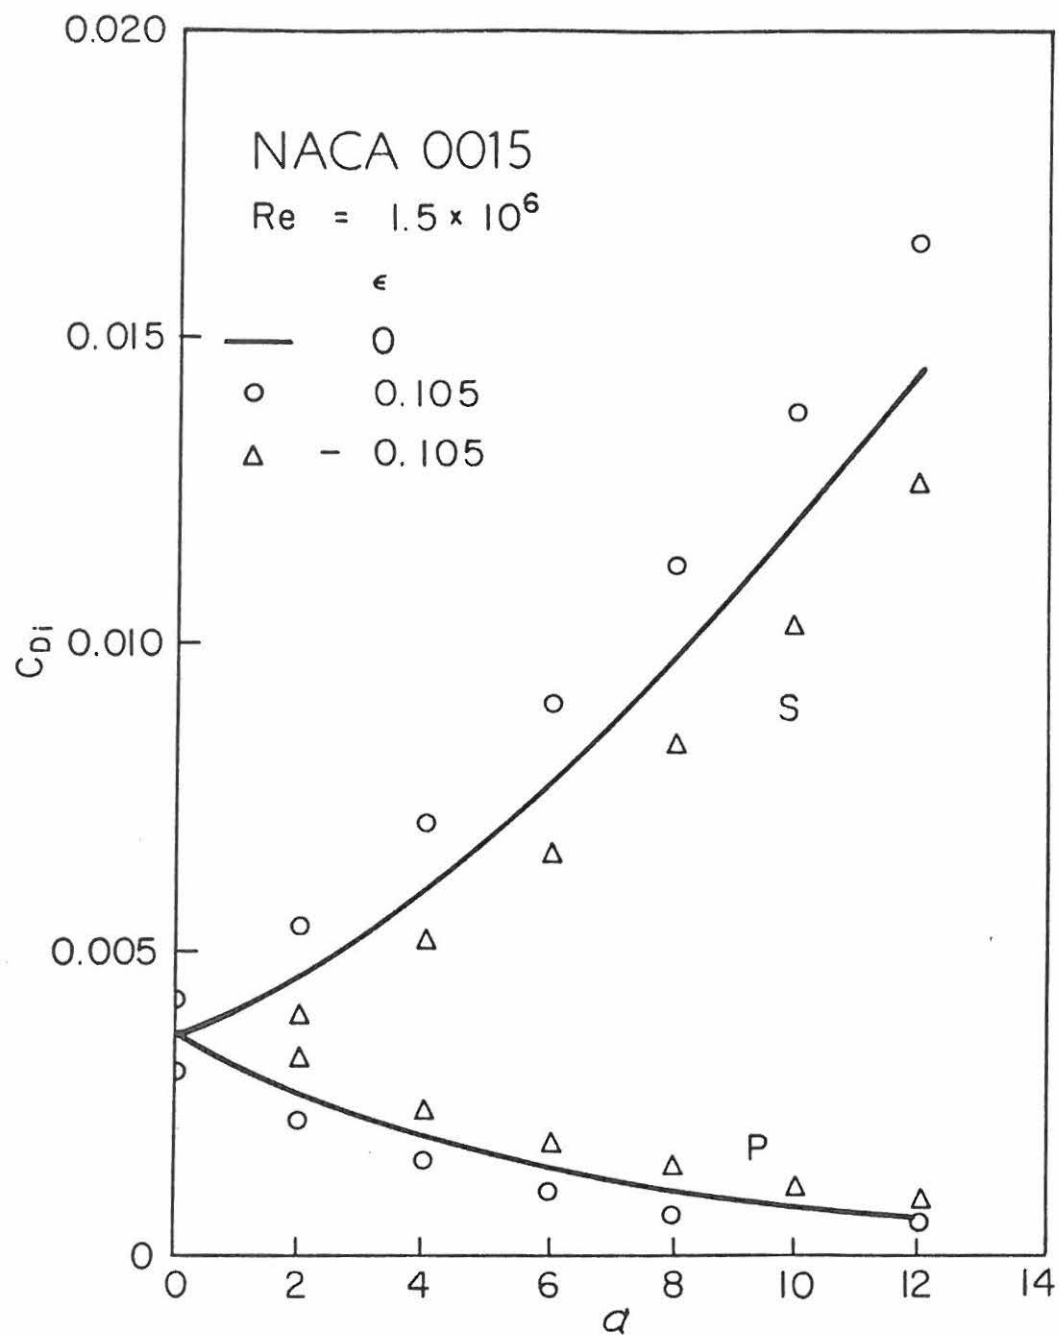


FIGURE 6. Contribution to drag coefficient from suction and pressure surfaces ($i = s$, suction surface; $i = p$, pressure surface).

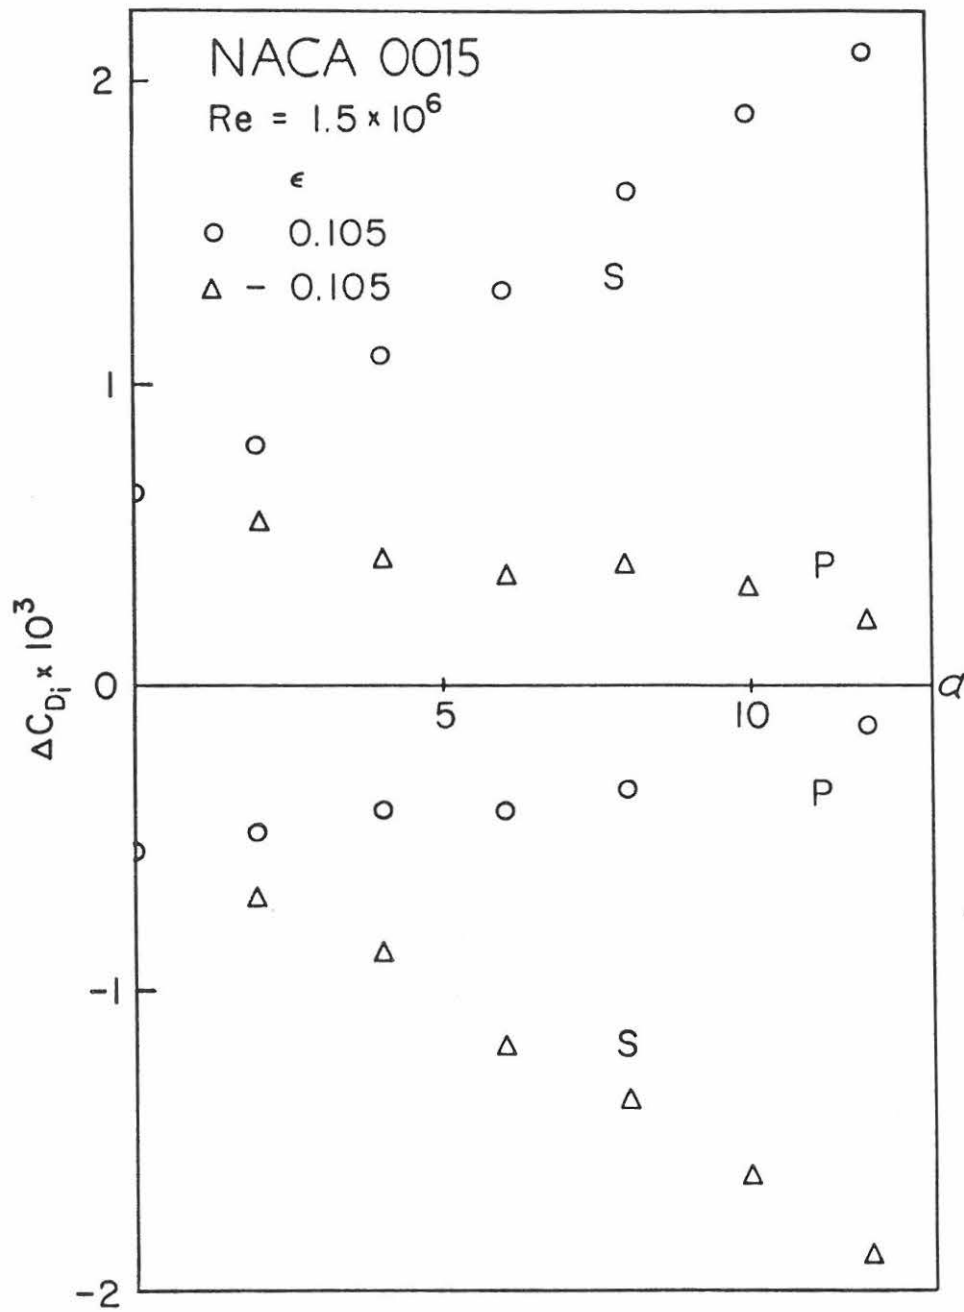


FIGURE 7. Increment in C_d due to pitching ($i = s$, contribution from suction surface; $i = p$, contribution from pressure surface).

DISTRIBUTION:

Alcoa Technical Center (5)
Aluminum Company of America
Alcoa Center, PA 15069
Attn: D. K. Ai
J. T. Huang
J. R. Jombock
M. Klingensmith
J. L. Prohaska

Alternative Sources of Energy
Milaca, MN 56353
Attn: L. Stoiaken

Amarillo College
Amarillo, TX 79100
Attn: E. Gilmore

American Wind Energy Association
1516 King Street
Alexandria, VA 22314

Arizona State University
University Library
Tempe, AZ 85281
Attn: M. E. Beecher

Dr. A. S. Barker
Trinity Western
7600 Glover Road
Langley, BC
CANADA V3A 4R9

Battelle-Pacific Northwest Laboratory
PO Box 999
Richland, WA 99352
Attn: L. Wendell

Bechtel Group, Inc.
PO Box 3965
San Francisco, CA 94119
Attn: B. Lessley

Dr. George Bergeles
Dept. of Mechanical Engineering
National Technical University
42, Patission Street
Athens, GREECE

Bonneville Power Administration
PO Box 3621
Portland, OR 97225
Attn: N. Butler

Burns & Roe, Inc.
800 Kinderkamack Road
Oradell, NJ 07649
Attn: G. A. Fontana

Canadian Standards Association
178 Rexdale Blvd.
Rexdale, Ontario, M9W 1R3
CANADA
Attn: T. Watson

Professor V. A. L. Chasteau
School of Engineering
University of Auckland
Private Bag
Auckland, NEW ZEALAND

Colorado State University
Dept. of Civil Engineering
Fort Collins, CO 80521
Attn: R. N. Meroney

Commonwealth Electric Co.
Box 368
Vineyard Haven, MA 02568
Attn: D. W. Dunham

Gale B. Curtis
Curtis Associates
3089 Oro Blanco Drive
Colorado Springs, CO 80917

M. M. Curvin
11169 Loop Road
Soddy Daisy, TN 37379

Department of Economic Planning
and Development
Barrett Building
Cheyenne, WY 82002
Attn: G. N. Monsson

Otto de Vries
National Aerospace Laboratory
Anthony Fokkerweg 2
Amsterdam 1017
THE NETHERLANDS

DOE/ALO
Albuquerque, NM 87115
Attn: G. P. Tennyson

DOE/ALO
Energy Technology Liaison Office
NGD
Albuquerque, NM 87115
Attn: Capt. J. L. Hanson, USAF

DOE Headquarters (20)
Wind Energy Technology Division
1000 Independence Avenue
Washington, DC 20585
Attn: D. F. Ancona
P. Goldman

Dominion Aluminum Fabricating, Ltd. (2)
3570 Hawkestone Road
Mississauga, Ontario, L5C 2V8
CANADA
Attn: L. Schienbein
C. Wood

J. B. Dragt
Nederlands Energy Research Foundation
(E.C.N.)
Physics Department
Westerduinweg 3 Petten (nh)
THE NETHERLANDS

Dynergy Systems Corporation
821 West L Street
Los Banos, CA 93635
Attn: C. Fagundes

Dr. Norman E. Farb
10705 Providence Drive
Villa Park, CA 92667

Electric Power Research Institute
3412 Hillview Avenue
Palo Alto, CA 94304
Attn: E. Demeo
F. Goodman

Alcir de Faro Orlando
Pontificia Universidade Catolica-PUC/Rj
Mechanical Engineering Department
R. Marques de S. Vicente 225
Rio de Janeiro, BRAZIL

FloWind Corporation (4)
21249 72nd Avenue South
Kent, WA 98032
Attn: Herman M. Drees
S. Tremoulet
I. E. Vas
R. Watson

A. D. Garrad
Garrad Hasson
10 Northampton Square
London EC1M 5PA
UNITED KINGDOM

Gates Learjet
Mid-Continent Airport
PO Box 7707
Wichita, KS 67277
Attn: G. D. Park

H. Gerardin
Mechanical Engineering Department
Faculty of Sciences and Engineering
Universite Laval-Quebec, G1K 7P4
CANADA

R. T. Griffiths
University College of Swansea
Dept. of Mechanical Engineering
Singleton Park
Swansea, SA2 8PP
UNITED KINGDOM

Helion, Inc.
Box 445
Brownsville, CA 95919
Attn: J. Park, President

Institut de Recherche d'Hydro-Quebec
1800, Montee Ste-Julie
Varennnes, Quebec, JOL 2PO
CANADA
Attn: Gaston Beaulieu
Bernard Masse

Iowa State University
Agricultural Engineering, Room 213
Ames, IA 50010
Attn: L. H. Soderholm

M. Jackson
McAllester Financial
1816 Summit
W. Lafayette, IN 47906

Kaiser Aluminum and Chemical Sales, Inc.
14200 Cottage Grove Avenue
Dolton, IL 60419
Attn: A. A. Hagman

Kaiser Aluminum and Chemical Sales, Inc.
6177 Sunol Blvd.
PO Box 877
Pleasanton, CA 94566
Attn: D. D. Doerr

Kansas State University
Electrical Engineering Department
Manhattan, KS 66506
Attn: Dr. G. L. Johnson

R. E. Kelland
The College of Trades and Technology
PO Box 1693
Prince Philip Drive
St. John's, Newfoundland, A1C 5P7
CANADA

KW Control Systems, Inc.
RD#4, Box 914C
South Plank Road
Middletown, NY 10940
Attn: R. H. Klein

Kalman Nagy Lehoczky
Cort Adellers GT. 30
Oslo 2, NORWAY

L. Liljidahl
Building 005, Room 304
Barc-West
Beltsville, MD 20705

Olle Ljungstrom
FFA, The Aeronautical Research Institute
Box 11021
S-16111 Bromma, SWEDEN

Robert Lynette
R. Lynette & Assoc., Inc.
15921 SE 46th Way
Bellevue, WA 98006

Massachusetts Institute of Technology (2)
77 Massachusetts Avenue
Cambridge, MA 02139
Attn: Professor N. D. Ham
W. L. Harris, Aero/Astro Dept.

H. S. Matsuda
Composite Materials Laboratory
Pioneering R&D Laboratories
Toray Industries, Inc.
Sonoyama, Otsu, Shiga, JAPAN 520

G. M. McNerney
US Wind Power
160 Wheeler Road
Burlington, MA 01803

Michigan State University
Division of Engineering Research
East Lansing, MI 48825
Attn: O. Krauss

Napier College of Commerce and Technology
Tutor Librarian, Technology Faculty
Colinton Road
Edinburgh, EH10 5DT
ENGLAND

NASA Lewis Research Center (2)
21000 Brookpark Road
Cleveland, OH 44135
Attn: D. Baldwin
J. Savino

National Rural Electric Cooperative Assn
1800 Massachusetts Avenue NW
Washington, DC 20036
Attn: Wilson Prichett, III

Natural Power, Inc.
New Boston, NH 03070
Attn: Leander Nichols

Northwestern University
Dept. of Civil Engineering
Evanston, IL 60201
Attn: R. A. Parmalee

Ohio State University
Aeronautical and Astronautical Dept.
2070 Neil Avenue
Columbus, OH 43210
Attn: Professor G. Gregorek

Oklahoma State University
Mechanical Engineering Dept.
Stillwater, OK 76074
Attn: D. K. McLaughlin

Oregon State University (2)
Mechanical Engineering Dept.
Corvallis, OR 97331
Attn: R. W. Thresher
R. E. Wilson

Pacific Gas & Electric
3400 Crow Canyon Road
San Ramon, CA 94583
Attn: T. Hillesland

Ion Paraschivoiu
Department of Mechanical Engineering
Ecole Polytechnique
CP 6079
Succursale A
Montreal H3C 3A7
CANADA

Troels Friis Pedersen
Riso National Laboratory
Postbox 49
DK-4000 Roskilde
DENMARK

Helge Petersen
Riso National Laboratory
DK-4000 Roskilde
DENMARK

The Power Company, Inc.
PO Box 221
Genesee Depot, WI 53217
Attn: A. A. Nedd

Power Technologies Inc.
PO Box 1058
Schenectady, NY 12301-1058
Attn: Eric N. Hinrichsen

Public Service Co. of New Hampshire
1000 Elm Street
Manchester, NH 03105
Attn: D. L. C. Frederick

Public Service Company of New Mexico
PO Box 2267
Albuquerque, NM 87103
Attn: M. Lechner

RANN, Inc.
260 Sheridan Ave., Suite 414
Palo Alto, CA 94306
Attn: A. J. Eggers, Jr.

The Resources Agency
Department of Water Resources
Energy Division
PO Box 388
Sacramento, CA 95802
Attn: R. G. Ferreira

Dr. R. Ganesh Rajagopalan, Asst. Prof.
Aerospace Engineering Department
Iowa State University
404 Town Engineering Bldg.
Ames, IA 50011

Reynolds Metals Company
Mill Products Division
6601 West Broad Street
Richmond, VA 23261
Attn: G. E. Lennox

R. G. Richards
Atlantic Wind Test Site
PO Box 189
Tignish P.E.I., COB 2B0
CANADA

A. Robb
Memorial University of Newfoundland
Faculty of Engineering and Applied Sciences
St. John's Newfoundland, A1C 5S7
CANADA

Rockwell International
Rocky Flats Plant
PO Box 464
Golden, CO 80401
Attn: A. Trenka (2)

Dr. Ing. Hans Ruscheweyh
Institut fur Leichbau
Technische Hochschule Aachen
Wullnerstrasse 7
FEDERAL REPUBLIC OF GERMANY

Beatrice de Saint Louvent
Etablissement d'Etudes et de Recherches
Meteorologiques
77 Rue de Serves
92106 Boulogne-Billancourt Cedex
FRANCE

Gwen Schreiner
Librarian
National Atomic Museum
Albuquerque, NM 87185

Arnan Seginer
Professor of Aerodynamics
Technion-Israel Institute of Technology
Department of Aeronautical Engineering
Haifa
ISRAEL

Mr. Farrell Smith Seiler, Editor
Wind Energy Abstracts
PO Box 3870
Bozeman, MT 59772-3870

David Sharpe
Dept. of Aeronautical Engineering
Queen Mary College
Mile End Road
London, E1 4NS
UNITED KINGDOM

Kent Smith
Instituto Tecnológico Costa Rica
Apartado 159 Cartago
COSTA RICA

Bent Sorenson
Roskilde University Center
Energy Group, Bldg. 17.2
IMFUFA
PO Box 260
DK-400 Roskilde
DENMARK

Peter South
ADECON
32 Rivalda Road
Weston, Ontario, M9M 2M3
CANADA

Southern California Edison
Research & Development Dept., Room 497
PO Box 800
Rosemead, CA 91770
Attn: R. L. Scheffler

G. Stacey
The University of Reading
Department of Engineering
Whiteknights, Reading, RG6 2AY
ENGLAND

Stanford University
Dept. of Aeronautics and
Astronautics Mechanical Engineering
Stanford, CA 94305
Attn: Holt Ashley

R. J. Templin (3)
Low Speed Aerodynamics Laboratory
NRC-National Aeronautical Establishment
Montreal Road
Ottawa, Ontario, K1A 0R6
CANADA

Texas Tech University (2)
Mechanical Engineering Dept.
PO Box 4289
Lubbock, TX 79409
Attn: J. W. Oler
J. Strickland

Tulane University
Dept. of Mechanical Engineering
New Orleans, LA 70018
Attn: R. G. Watts

Tumac Industries, Inc.
650 Ford Street
Colorado Springs, CO 80915
Attn: J. R. McConnell

J. M. Turner
Terrestrial Energy Technology Program Office
Energy Conversion Branch
Aerospace Power Division/Aero Propulsion Lab
Air Force Systems Command (AFSC)
Wright-Patterson Air Force Base, OH 45433

United Engineers and Constructors, Inc.
PO Box 8223
Philadelphia, PA 19101
Attn: A. J. Karalis

Universal Data Systems
5000 Bradford Drive
Huntsville, AL 35805
ATTN: C. W. Dodd

University of Alaska
Geophysical Institute
Fairbanks, AK 99701
Attn: T. Wentink, Jr.

University of California
Institute of Geophysics
and Planetary Physics
Riverside, CA 92521
Attn: Dr. P. J. Baum

University of Colorado
Dept. of Aerospace Engineering Sciences
Boulder, CO 80309
Attn: J. D. Fock, Jr.

University of Massachusetts
Mechanical and Aerospace Engineering Dept.
Amherst, MA 01003
Attn: Dr. D. E. Cromack

University of New Mexico
New Mexico Engineering Research Institute
Campus PO Box 25
Albuquerque, NM 87131
Attn: G. G. Leigh

University of Oklahoma
Aero Engineering Department
Norman, OK 73069
Attn: K. Bergey

University of Sherbrooke
Faculty of Applied Science
Sherbrooke, Quebec, J1K 2R1
CANADA
Attn: A. Laneville
P. Vittecoq

The University of Tennessee
Dept. of Electrical Engineering
Knoxville, TN 37916
Attn: T. W. Reddoch

USDA, Agricultural Research Service
Southwest Great Plains Research Center
Bushland, TX 79012
Attn: Dr. R. N. Clark

Utah Power and Light Co.
51 East Main Street
PO Box 277
American Fork, UT 84003
Attn: K. R. Rasmussen

W. A. Vachon
W. A. Vachon & Associates
PO Box 149
Manchester, MA 01944

VAWTPower, Inc.
134 Rio Rancho Drive
Rio Rancho, NM 87124
Attn: P. N. Vosburgh

Washington State University
Dept. of Electrical Engineering
Pullman, WA 99163
Attn: F. K. Bechtel

West Texas State University
Government Depository Library
Number 613
Canyon, TX 79015

West Texas State University
Department of Physics
PO Box 248
Canyon, TX 79016
Attn: V. Nelson

West Virginia University
Dept. of Aero Engineering
1062 Kountz Avenue
Morgantown, WV 26505
Attn: R. Walters

D. Westlind
Central Lincoln People's Utility District
2129 North Coast Highway
Newport, OR 97365-1795

Wichita State University
Aero Engineering Department (2)
Wichita, KS 67208
Attn: M. Snyder
W. Wentz

Wind Energy Abstracts
PO Box 3870
Bozeman, MT 59772
Attn: Farrell Smith Seiler

Wind Power Digest
PO Box 700
Bascom, OH 44809
Attn: Michael Evans

Wisconsin Division of State Energy
8th Floor
101 South Webster Street
Madison, WI 53702
Attn: Wind Program Manager

1520 D. J. McCloskey
 1522 R. C. Reuter, Jr.
 1523 J. H. Biffle
 1524 W. N. Sullivan
 1524 D. W. Lobitz
 1600 R. G. Clem
 1630 R. C. Maydew
 1636 J. K. Cole
 2525 R. P. Clark
 3141-1 C. M. Ostrander (5)
 3151 W. L. Garner (3)
 3154-3 C. H. Dalin (28)
 For DOE/TIC (Unlimited Release)
 3160 J. E. Mitchell (15)
 3161 P. S. Wilson
 6000 E. H. Beckner
 6200 V. L. Dugan
 6220 D. G. Schueler
 6225 H. M. Dodd (50)
 6225 T. D. Ashwill
 6225 D. E. Berg
 6225 L. R. Gallo
 6225 R. D. Grover
 6225 P. C. Klimas
 6225 M. T. Mattison
 6225 D. S. Oscar
 6225 M. E. Ralph
 6225 M. H. Worstell
 7111 J. W. Reed
 7544 D. R. Schafer
 7544 T. G. Carne
 7544 J. Lauffer
 8024 M. A. Pound

